


DLK 185 FORTIMO LED DLM



Recessed LED luminaire. Body is made of steel and aluminium and it is available in all RAL colours. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request. Passive cooling, optional IP44 diffuser.

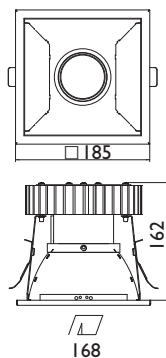

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
With integrated AC driver						
005265.1100/830	1100 lm	12W	3000 K	Ra > 80	50.000 h	2,30 kg
005265.1100/840	1100 lm	12W	4000 K	Ra > 80	50.000 h	2,30 kg
005265.2000/830	2000 lm	28W	3000 K	Ra > 80	50.000 h	2,30 kg
005265.2000/840	2000 lm	26W	4000 K	Ra > 80	50.000 h	2,30 kg
005265.3000/830	3000 lm	43W	3000 K	Ra > 80	50.000 h	2,30 kg
005265.3000/840	3000 lm	39W	4000 K	Ra > 80	50.000 h	2,30 kg
With AC/DC driver						
002587.1100/830	1100 lm	12W	3000 K	Ra > 80	50.000 h	2,50 kg
002587.1100/840	1100 lm	12W	4000 K	Ra > 80	50.000 h	2,50 kg
002587.2000/830	2000 lm	20W	3000 K	Ra > 80	50.000 h	2,50 kg
002587.2000/840	2000 lm	20W	4000 K	Ra > 80	50.000 h	2,50 kg
002587.3000/830	3000 lm	30W	3000 K	Ra > 80	50.000 h	2,50 kg
002587.3000/840	3000 lm	30W	4000 K	Ra > 80	50.000 h	2,50 kg

* Different lumen output or wattage available on request.

* System power consumption (LED module & driver) depends on components used. Contact us for detailed information.

