


HERON



LED street luminaire Heron has been developed to ensure maximum energy efficiency in combination with modern design. Body is made of die-casted aluminium and is available in 3 standard RAL colours 9006 , 9007 and 7138 - all other colours on request. Heron is available with six different versions of optics.

Applications : streets, parks, car parks and all other outdoor spaces.

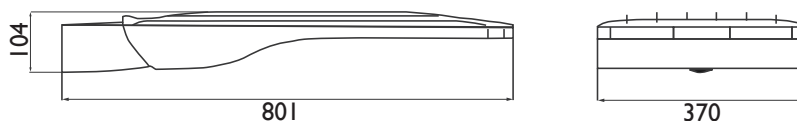

GENERAL INFORMATION:

Voltage: 220-240V
 Frequency: 50-60 Hz
 Color temperature: 3000 K, 4000 K, 5000 K
 Working temperature: -40 °C / +35 °C
 Protection class: IP66
 Impact resistance class: IK08
 Color rendering index (CRI): Ra >80
 Safety class: I
 Power Supply lighting protection: 3kV
 Dimming: 1-10V; DALI; PWM; BI-POWER DYNAdim
 Mounting vertical, horizontal: Ø40-60
 Life time: 50 000 h (depending on modification)
 Warranty: 5 years (depending on modification)

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
004971.10500/730	10500 lm	72 W	3000 K	Ra > 70	50.000 h	12 kg
004971.10500/740	10500 lm	72 W	4000 K	Ra > 70	50.000 h	12 kg
004971.10500/757	10500 lm	72 W	5700 K	Ra > 70	50.000 h	12 kg
004971.14000/730	14000 lm	96 W	3000 K	Ra > 70	50.000 h	12 kg
004971.14000/740	14000 lm	96 W	4000 K	Ra > 70	50.000 h	12 kg
004971.14000/757	14000 lm	96 W	5700 K	Ra > 70	50.000 h	12 kg
004971.17500/730	17500 lm	120 W	3000 K	Ra > 70	50.000 h	12 kg
004971.17500/740	17500 lm	120 W	4000 K	Ra > 70	50.000 h	12 kg
004971.17500/757	17500 lm	120 W	5700 K	Ra > 70	50.000 h	12 kg

