


LWN 1200 OP LED



Recessed LED IP65 luminaire with opal diffuser designed for modular ceiling. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request. Body is made of steel and aluminium and is available in all RAL colours. High quality, energy efficient white LED light with CRI 80. Perfect replacement for conventional T5 luminaires.

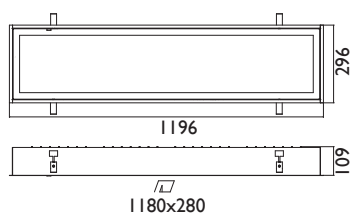

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
003754.ST5000/830	5000 lm	32 W	3000 K	Ra > 80	50.000 h	6,50 kg
003754.ST5000/840	5000 lm	32 W	4000 K	Ra > 80	50.000 h	6,50 kg

