

# PROFI 80 R LED LINE



Pendent, surface mounted or recessed LED luminaires with opal or acrylic diffuser. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request.

Body is made of aluminium profile and available in all RAL colours.

This luminaire can be mounted directly to the ceiling or pendent on steel wires and can be connected in long lighting lines.


We can prepare it in different lengths and shapes on request.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

- L - 586 x 84
- L - 867 x 84
- L - 1148 x 84
- L - 1429 x 84

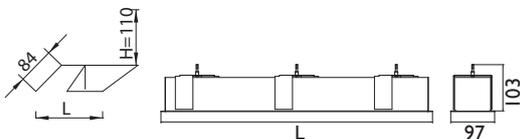

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
004410.LL2200/830	2200 lm	15 W	3000 K	Ra > 80	50.000 h	1,70 kg
004410.LL2200/840	2200 lm	15 W	4000 K	Ra > 80	50.000 h	1,70 kg
004410.LL3300/830	3300 lm	23 W	3000 K	Ra > 80	50.000 h	2,20 kg
004410.LL3300/840	3300 lm	23 W	4000 K	Ra > 80	50.000 h	2,20 kg
004410.LL4400/830	4400 lm	30 W	3000 K	Ra > 80	50.000 h	2,70 kg
004410.LL4400/840	4400 lm	30 W	4000 K	Ra > 80	50.000 h	2,70 kg
004410.LL5500/830	5500 lm	38 W	3000 K	Ra > 80	50.000 h	3,70 kg
004410.LL5500/840	5500 lm	38 W	4000 K	Ra > 80	50.000 h	3,70 kg
004410.LL8000/830	8000 lm	58 W	3000 K	Ra > 80	50.000 h	2,70 kg
004410.LL8000/840	8000 lm	58 W	4000 K	Ra > 80	50.000 h	2,70 kg
004410.LL10000/830	10000 lm	73 W	3000 K	Ra > 80	50.000 h	3,70 kg
004410.LL10000/840	10000 lm	73 W	4000 K	Ra > 80	50.000 h	3,70 kg

\* Ra > 90 modules, different lumen output or wattage available on request.

\* System power consumption (LED module & driver) depends on components used. Contact us for detailed information.

\* Tunable White LED modules on request.

