

PROFI TEC5 IND LED LINE




Pendent, indirect LED luminaire. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request. Body is made of aluminium profile and available in all RAL colours. This luminaire can be connected in long lighting lines. We can prepare it in different lengths and shapes on request. Standard length of suspension set - 1,5 meter.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

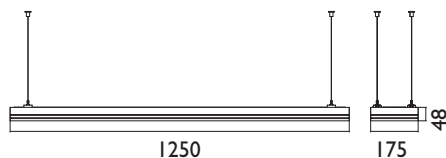

| Index no. | Lumen output | Wattage | Colour temp. | Colour rendering index | Lifetime | Weight |
|-------------------|--------------|---------|--------------|------------------------|----------|---------|
| 003507.LL4400/830 | 4400 lm | 30 W | 3000 K | Ra > 80 | 50.000 h | 3,20 kg |
| 003507.LL4400/840 | 4400 lm | 30 W | 4000 K | Ra > 80 | 50.000 h | 3,20 kg |
| 003507.LL8000/830 | 8000 lm | 58 W | 3000 K | Ra > 80 | 50.000 h | 3,20 kg |
| 003507.LL8000/840 | 8000 lm | 58 W | 4000 K | Ra > 80 | 50.000 h | 3,20 kg |

