



# PS 600 LED



Recessed LED luminaire for modular ceiling. Body is made of steel and aluminium and it is available in all RAL colours. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request.

| Index no.       | Lumen output | Wattage | Colour temp. | Colour rendering index | Lifetime | Weight  |
|-----------------|--------------|---------|--------------|------------------------|----------|---------|
| 005521.4400/830 | 2x2200 lm    | 36 W    | 3000 K       | 80 Ra                  | 50,000 h | 3,40 kg |
| 005521.4400/840 | 2x2000 lm    | 36 W    | 4000 K       | 80 Ra                  | 50,000 h | 3,40 kg |

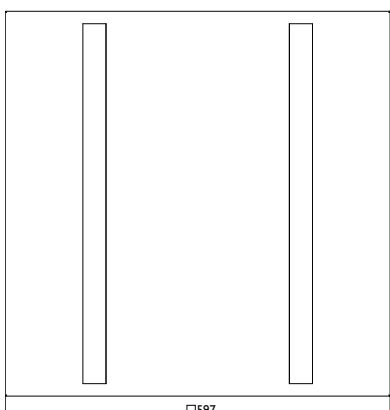

\* Different lumen output or wattage available on request.

\* System power consumption (LED module & driver) depends on components used. Contact us for detailed information.

