

# UNI LED SPOT




Track mounted LED luminaire. Body is made of steel and aluminium and it is available in all RAL colours. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request.

High quality, energy efficient white LED light with CRI 80 and more.

Applications:

- Retail: shop windows, wall - washing, accent and display lighting
- Hospitality: lobbies, reception areas
- Recreation: museums, galleries, theatres

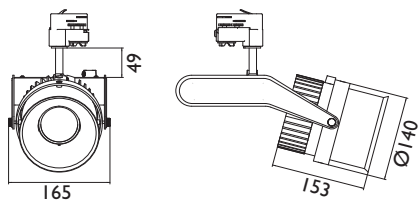

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
003401.1100/830	1100 lm	12 W	3000 K	Ra > 80	50.000 h	2,46 kg
003401.1100/840	1100 lm	12 W	4000 K	Ra > 80	50.000 h	2,46 kg
003401.2000/830	2000 lm	20 W	3000 K	Ra > 80	50.000 h	2,46 kg
003401.2000/840	2000 lm	20 W	4000 K	Ra > 80	50.000 h	2,46 kg

\* Different lumen output or wattage available on request.

\* System power consumption (LED module & driver) depends on components used. Contact us for detailed information.

