


WALL T3 LED

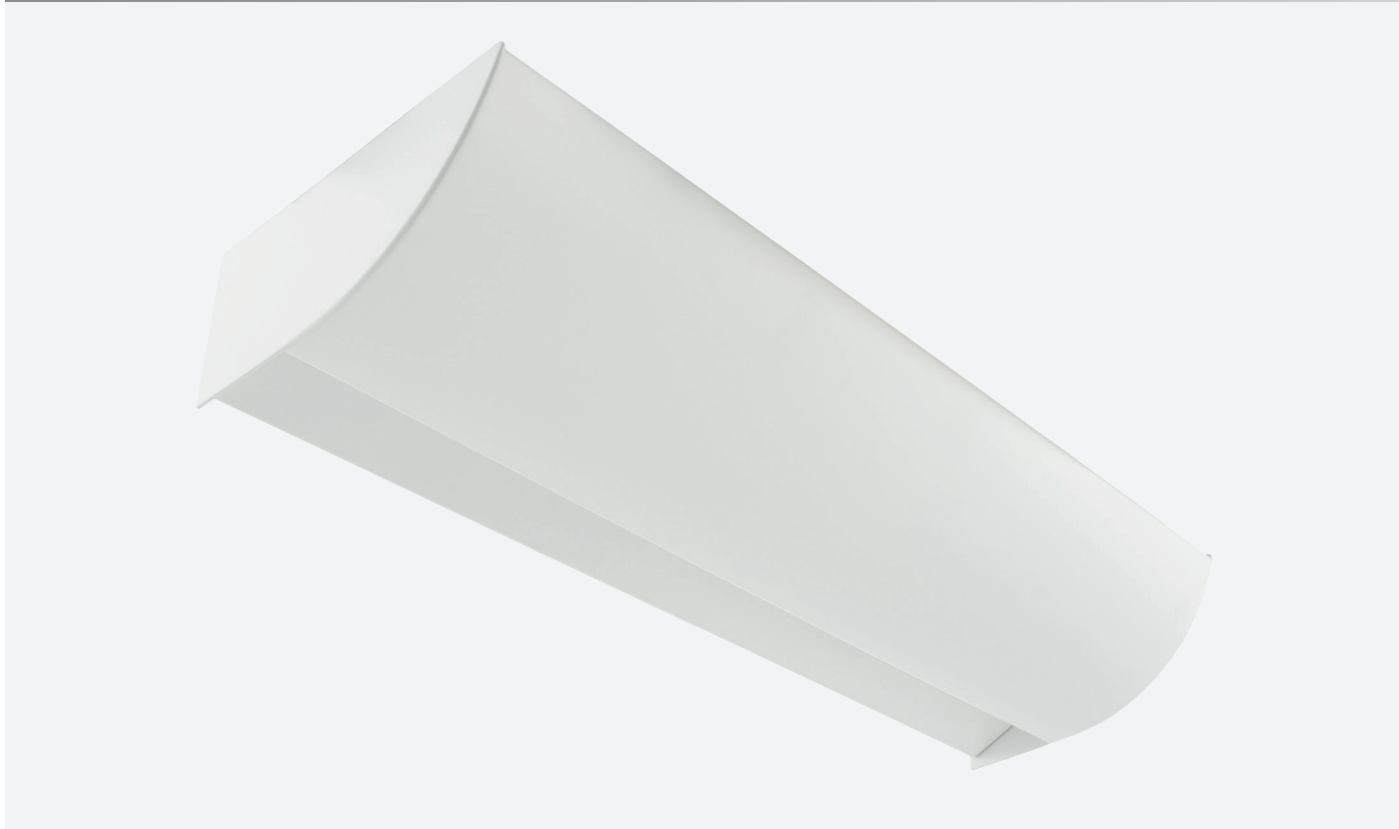


Wall mounted indirect luminaire. Body is made of aluminium.

All RAL colours are available.

Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request.

Applications:

- Hospitality, health care, corridors, service areas, lobbies, lounges, restaurants, reception areas
- Home
- Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
004253.22200/830	2 x 2200 lm	2 x 15 W	3000 K	Ra > 80	50.000 h	3,20 kg
004253.22200/840	2 x 2200 lm	2 x 15 W	4000 K	Ra > 80	50.000 h	3,20 kg

